




WS-8700 /DDL-9000B

自动衬衫贴袋缝纫机
AUTOMATIC POCKET SEWING MACHINE

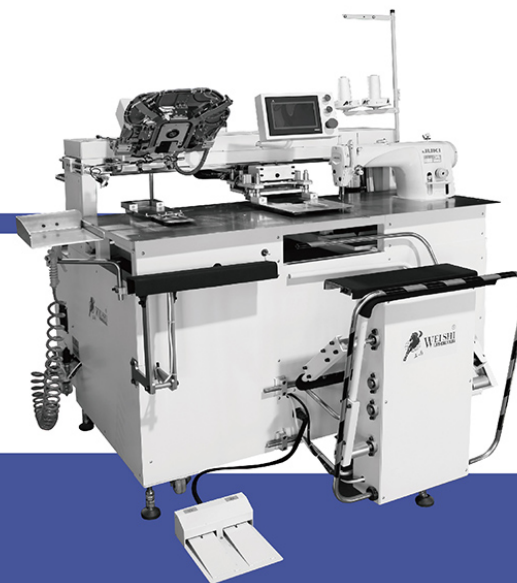

技术特点

- 1.采用折袋缝制一次完成工艺。
- 2.快速换模功能，操作快捷、高效。
- 3.缝制口袋的形状（圆角、直角、斜角）和尺寸可任意调取和设定，缝制完成后自动收料，并带有局部修正的功能；
- 4.下顶辅助折袋装置，保证缝制效果的稳定性；
- 5.自动断线检测功能，可实时保证缝制效果，并配有紧急停止按钮装置，确保设备安全运行。

生产性能

1人操作1台 2000-2200件/8小时（自动折袋并缝制）

由于缝制条件（形状、长度、宽度、针距）不同，生产效率有所不同。

WS-8700-01 单线

WS-8700-02 双线

Technical feature

- 1.A perfect product quality is created by adopting the nonrecurring completion process of folding and sewing.
- 2.Fast mould-changing function is efficient and fast.
- 3.The pocket shape and size (round angle, right angle and oblique angle) can be set and retrieved randomly.Auto Rubbish collecting function after sewing is applied with local revision available.
- 4.Downards pusing device ensures the stability of pocket folding.
- 5.Auto detecting of the threading cutting ensures sewing efficiency,and emergency stop device gurantees saftey operation.

Performance

1 person operates 1 set 2000-2200 pieces/8 hours(auto folding and sewing)

Output vaires due to different sewing conditions(shape,length,width,needle pitch)

WS-8700-01 Single thread

WS-8700-02 Double thread

1-3mm STITCH LENGTH

主要规格

最高缝制速度/rpm: 3000
 针距长度/mm: 1-3
 送料方式: X/Y向伺服送料
 缝制范围/mm: X=80-175
 Y=80-150
 额定电压/V: 220
 工作气压/Mpa: 0.5
 耗气量L/min: 200
 外型尺寸/mm: 1700x1500x1450
 设备重量/ kg: 400

MAIN SPECIFICATION

Max sewing speed/rpm: 3000
 Stitch length/mm:1-3
 Feeding style:X/Y servo feeding
 Sewing scope/mm: X=80-175 and Y=80-150
 Rated voltage/V: 220
 Operating air pressure/MPa:0.5
 Air consumptionL/min : 200
 Equipment dimension/mm:1700x1500x1450
 Equipment weight/ Kg: 400